

Product Features


- Pb-Ca-Sn multi-components alloy.
- High purity electrolysis lead, high density lead paste, special long effective additive .
- High adsorptive performance AGM separator.
- Excellent cycle life and recoverage performance from over-discharged state.
- Excellent large current discharge performance, there is obvious advantage in start-up and climbing slope stage.
- Good large current discharge performance, good low temperature endurance and shock endurance.
- Maintenance free, there is no need to add water during operation.

Application

- Electricity powered bicycle
- Electricity powered motorcycle
- Electricity powered scooters
- Electricity powered toys cart

Compliant Standards

- ☒ GB/T 22199.1-2008
- ☒ GB/T 23636-2009
- ☒ GB/T 18332.1-2009
- ☒ Passed ISO9001:2000 、 ISO14001 、 OHSAS18001、 UL、 CE certificate

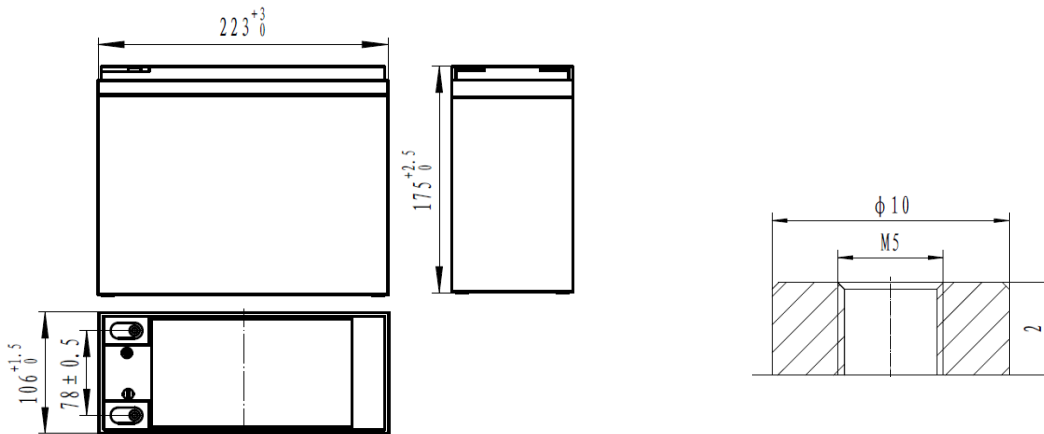

Battery Model	6-DZM-35			
Designed Life	650 times (70%DOD)			
Capacity(25℃)	20HR(2.25A,1.75V)	10HR(4.1A,1.75V)	5HR(7.6A,1.75V)	1HR(31.3A,1.75V)
	45Ah	41AH	38AH	31.3AH
Dimensions	Length	Width	Height	Total Height
	223mm	106mm	175mm	175mm
Approx. Weight	12kg			
Internal Resistance	6.0m Ω			
Maximum Discharge Current	350A(10 Sec.)			
Self Discharge	≤3% per months (25℃)			
Charge Voltage(25℃)	Cycle use		Float use	
	14.7V(-18mV/℃), max charge current:5.0A		14.1V(-18mV/℃)	

Discharge parameter:

Constant current discharge data (25°C , A)											
End voltage (V/cell)	10min	20min	30min	45min	60min	90min	2h	3h	5h	10h	20h
1.60	126.0	76.70	57.29	40.54	31.95	22.59	17.66	12.08	7.645	4.117	2.255
1.65	123.8	75.83	56.74	40.27	31.82	22.52	17.61	12.06	7.631	4.109	2.253
1.70	121.9	74.96	56.14	40.03	31.66	22.45	17.57	12.04	7.615	4.107	2.252
1.75	116.6	72.36	54.72	39.36	31.32	22.32	17.50	12.00	7.600	4.100	2.250

Constant power discharge data (25°C , W/cell)											
End voltage (V/cell)	10min	20min	30min	45min	60min	90min	2h	3h	5h	10h	20h
1.60	238.5	145.9	109.4	77.84	61.71	44.39	35.23	23.99	15.25	8.226	4.518
1.65	235.1	144.7	108.8	77.64	61.68	44.33	35.17	23.98	15.24	8.223	4.517
1.70	232.4	143.6	108.0	77.39	61.56	44.31	35.11	23.96	15.22	8.220	4.515
1.75	223.2	139.1	105.5	76.36	61.07	44.16	35.00	23.94	15.20	8.215	4.513

All data on the spec. sheet is an average value:

The tolerance range: $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

Performance Curve :
