



MOTOR SERIES CT1209(12V9AH/10HR)

Specifications


| | | |
|---------------------------------|--------------|------------------------|
| Nominal Voltage | | 12V |
| Capacity(10hr,25°C) | | 9AH |
| Dimension | Length | 151±2mm(5.94inch) |
| | Width | 87±2mm(3.43inch) |
| | Height | 107±2mm(4.21inch) |
| | Total Height | 107±2mm(4.21inch) |
| Approx Weight | | Approx. 3kg |
| Terminal Type | | L5 |
| container Material | | ABS(UL-94HB) |
| Nominal Operating Temp. Range | | -20°C~50°C(-4°F~122°F) |
| Standard Charging method (25°C) | Current | 0.9A |
| | Time | 5~10H |
| Quickly Charging method (25°C) | Current | 4.5A |
| | Time | 1h |
| Terminal material | | Lead |




Dimensions

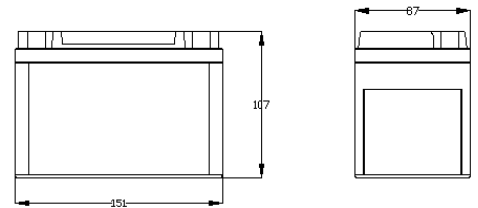


Terminal



Discharge Characteristics(25°C)

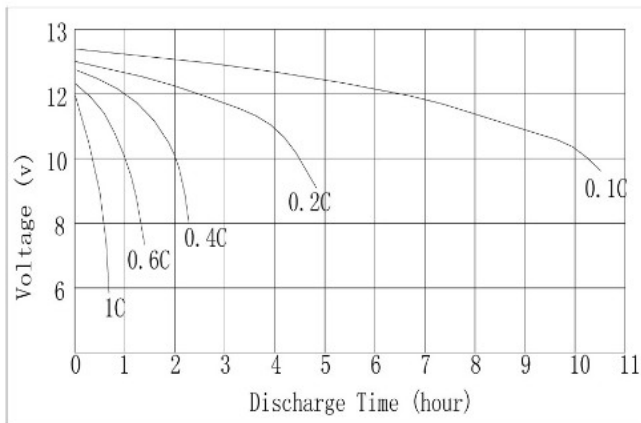

Self Discharge Characteristics

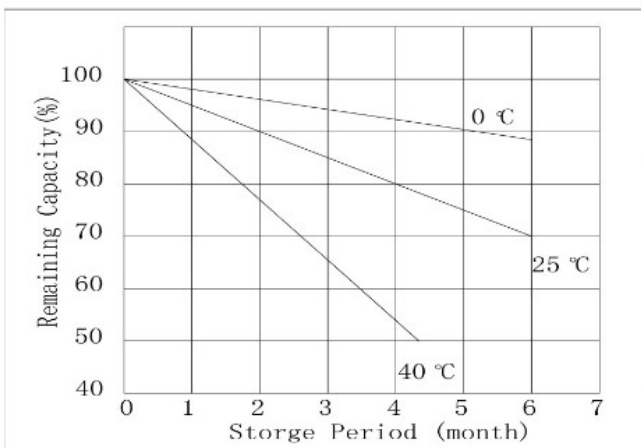



MH46642

