

SPG Series

SPG12-255W 12V70Ah

SPG series VRLA battery uses AGM technology and high-purity raw materials. It has good high power discharge, floating backup and fast charging performance. It is mainly used in UPS/EPS standby power supply systems. It can backup power in poor operation environment.



Benefits

- Long life according to EUROBAT Classification
- Maximum charge efficiency
- High gas recombination efficiency
- Low self-discharge rate
- Horizontal or vertical installation

Applications


- UPS units
- Data center
- Starting generators
- EPS units

Standards

- IEC 60896-21/22
- JIS C8704-1/2
- EUROBAT guide

Specifications

Drawing

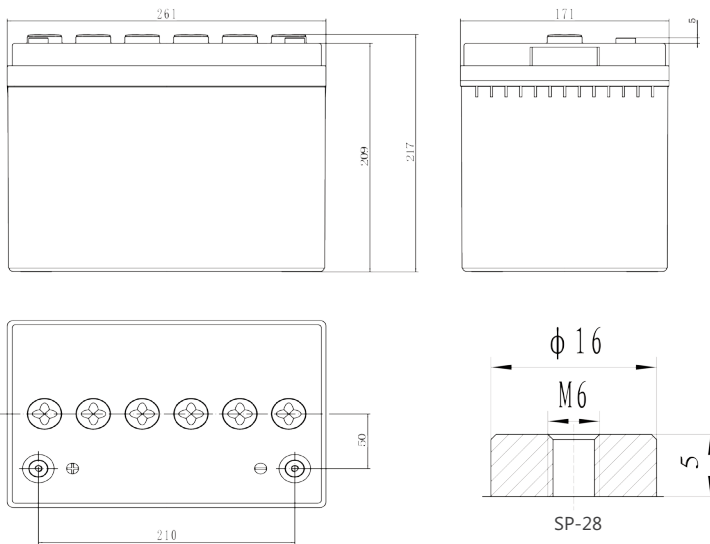





Battery Model	SPG12-255W			
Design Life (years, 25°C)	12			
Capacity (Ah, 25°C)	10min (1.60V)	15min (1.67V)	1HR (48.5A, 1.70V)	10HR (7.0A, 1.80V)
	330W/cell	255W/cell	48.5Ah	70Ah
Dimensions (mm)	Length	Width	Height	Total Height
	261	171	209	217
Approx. Weight (kg)	22.5			
Reference Internal Resistance (mΩ)	5.80 (fully charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	840			
Self-Discharge (25°C)	≤ 2% per months			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.40(-3.5mV/°C/cell), max charge current:21A		2.27(-3.5mV/°C/cell)	
Short Circuit Current (A)	2050			

Discharge Data

Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min							h						
	5	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	266	200	160	133	113	96.6	67.3	53.7	36.7	29.0	20.8	13.5	11.5	7.70
1.65	245	190	154	127	108	93.1	65.6	52.0	35.6	28.2	20.2	13.1	11.3	7.49
1.67	235	182	147	122	104	89.6	63.3	50.5	35.0	27.8	19.9	12.9	11.2	7.42
1.70	221	172	138	116	100	86.1	61.1	48.5	34.3	27.3	19.5	12.7	11.0	7.28
1.75	210	161	128	107	92.4	80.5	57.7	46.7	33.3	26.5	19.0	12.4	10.7	7.14
1.80	202	148	118	101	87.4	76.3	53.4	44.5	32.1	25.6	18.4	12.1	10.5	7.00

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min							h						
	5	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	435	330	268	221	183	170	124	97.8	74.6	56.9	42.5	26.9	22.9	15.1
1.65	424	317	260	215	179	164	121	94.3	72.5	55.2	41.4	26.1	22.5	15.0
1.67	405	310	255	211	175	160	118	92.9	70.7	53.9	40.6	25.5	22.2	14.8
1.70	388	304	252	205	170	156	117	90.8	69.4	52.9	40.0	25.1	21.8	14.6
1.75	375	295	242	197	164	150	113	88.1	67.8	51.8	38.8	24.6	21.4	14.4
1.80	365	283	232	191	158	144	109	84.6	65.3	50.1	37.6	23.9	20.9	14.1

Performance Curve

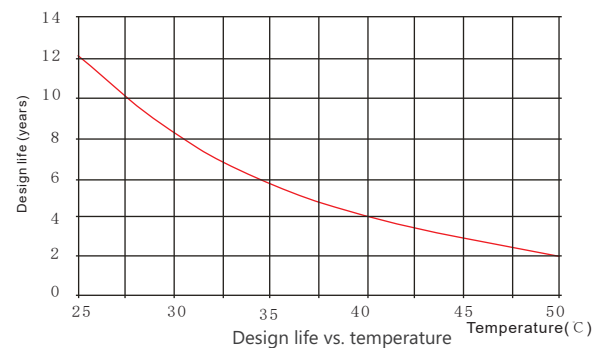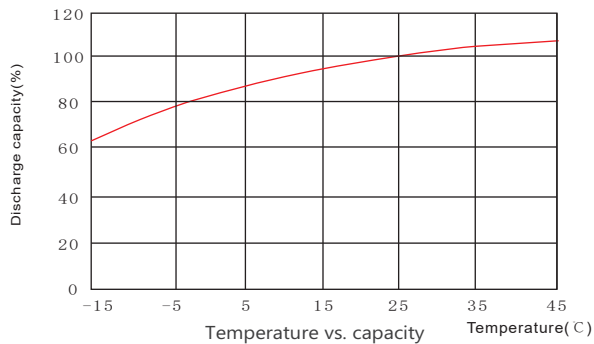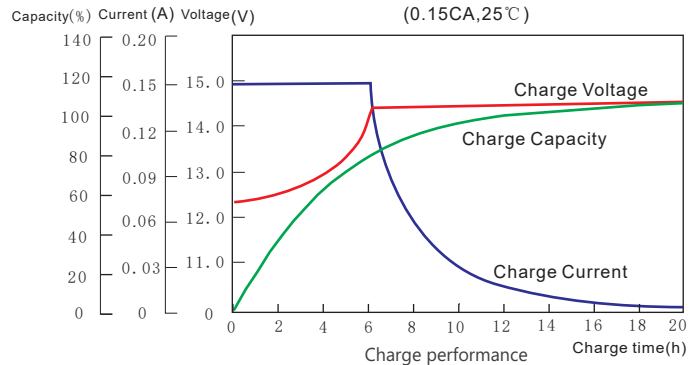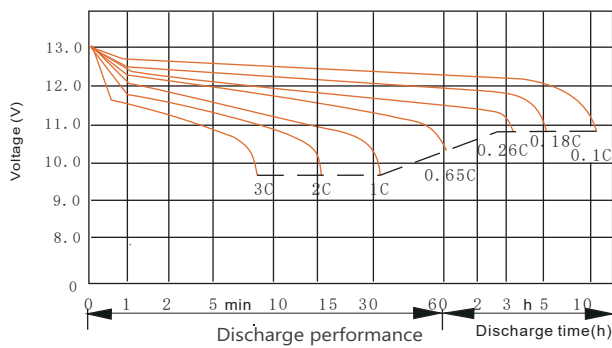

Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC
Tel: +86-537-4422313 Fax: +86-537-4411980
Email: sales@sacredsunsun.cn

Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong
Email: admin.hk@sacredsunsun.hk

Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555
Email: admin.sg@sacredsunsun.sg

Sacred Sun Europe SARRL

Add: ZAE Fontaine, 33210 Fargues, France
Email: admin.eu@sacredsunsun.eu

Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE
Email: admin.ae@sacredsunsun.ae

