

SPG Series

SPG12-300W 12V80Ah

SPG series VRLA battery uses AGM technology and high-purity raw materials. It has good high power discharge, floating backup and fast charging performance. It is mainly used in UPS/EPS standby power supply systems. It can backup power in poor operation environment.




Benefits

- Long life according to EUROBAT Classification
- Maximun charge efficiency
- High gas recombination efficiency
- Low self-discharge rate
- Horizontal or vertical installization

Applications

- UPS units
- Data center
- Starting generators
- EPS units

Drawing

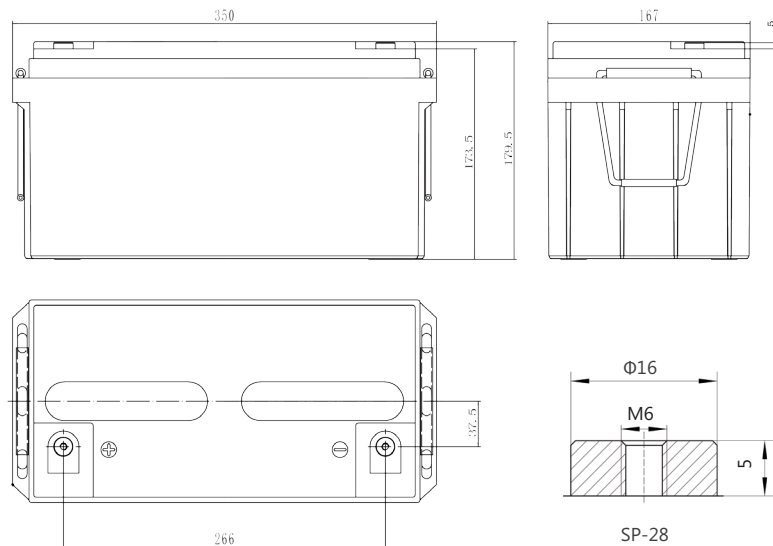

SP-28

Standards

- IEC 60896-21/22
- JIS C8704-1/2
- EUROBAT guide

Specifications





Battery Model	SPG12-300W			
Design Life (years, 25°C)	12			
Capacity (Ah, 25°C)	10min (1.60V)	15min (1.67V)	1HR (52.8A, 1.70V)	10HR 8.0A, 1.80V)
	399W/cell	300W/cell	52.8Ah	80Ah
Dimensions (mm)	Length	Width	Height	Total Height
	350	167	179.5	179.5
Approx. Weight (kg)	24.6			
Reference Internal Resistance (mΩ)	5.0 (fully charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	960			
Self-Discharge (25°C)	≤ 2% per months			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.40(-3.5mV/°C/cell), max charge current: 24A		2.27(-3.5mV/°C/cell)	
Short Circuit Current (A)	2400			

Discharge Data

Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min							h						
	5	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	276	207	166	138	118	100	69.9	58.5	41.9	33.8	23.8	15.4	13.2	8.80
1.65	255	197	160	132	113	96.8	68.2	56.6	40.7	32.9	23.0	14.9	12.9	8.56
1.67	244	189	153	127	109	93.1	65.8	55.0	40.0	32.3	22.7	14.8	12.7	8.48
1.70	229	178	143	120	104	89.5	63.5	52.8	39.2	31.8	22.3	14.5	12.5	8.32
1.75	218	167	133	111	96	83.7	60.0	50.9	38.1	30.9	21.7	14.2	12.3	8.16
1.80	210	154	122	105	91	79.3	55.5	48.4	36.6	29.8	21.0	13.9	12.0	8.00

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min							h						
	5	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	520	399	315	274	226	206	149	117	89.5	68.2	51.0	32.3	27.4	18.1
1.65	506	388	306	265	219	199	145	113	87.0	66.3	49.7	31.4	27.0	17.9
1.67	483	380	300	260	214	194	142	111	84.8	64.6	48.7	30.6	26.6	17.8
1.70	463	372	296	254	210	188	140	109	83.3	63.5	48.0	30.2	26.2	17.5
1.75	449	361	284	244	203	182	136	106	81.4	62.2	46.5	29.5	25.7	17.3
1.80	433	347	273	236	195	174	130	102	78.4	60.1	45.1	28.7	25.1	16.9

Performance Curve

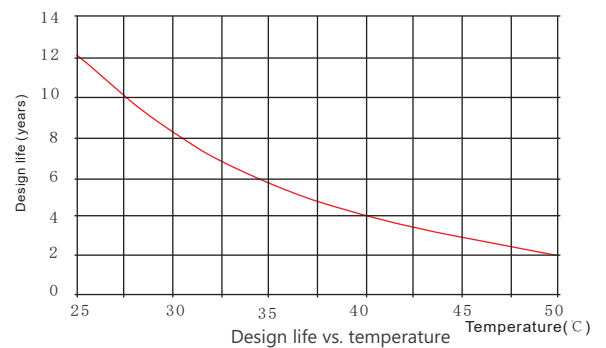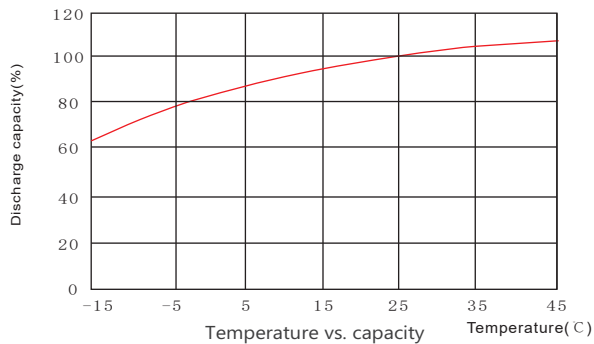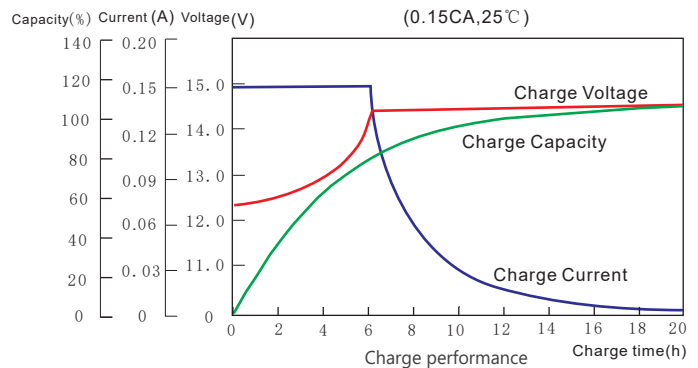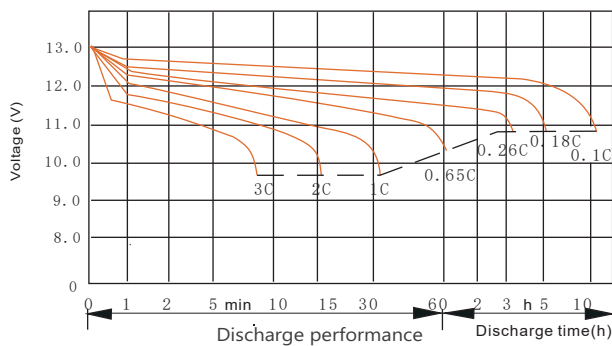

Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC
Tel: +86-537-4422313 Fax: +86-537-4411980
Email: sales@sacredsuns.cn

Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong
Email: admin.hk@sacredsuns.hk

Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555
Email: admin.sg@sacredsuns.sg

Sacred Sun Europe SARRL

Add: ZAE Fontaine, 33210 Fargues, France
Email: admin.eu@sacredsuns.eu

Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE
Email: admin.ae@sacredsuns.ae

